



Excellent Design & Manufacture

Level Detectors

EDM mechanical level detectors

are rugged, industrial products specifically designed for versatility of application. This catalog contains application and ordering data for float and displacer-operated level detectors. Detectors are available with flanged or sealed chambers or as insertion models.

Options available for each type of detector include: detector type and number, housing type, chamber material, process connections, accessories, and more. Units may be customized to suit customers' needs.

Inside this catalog you will find solutions to your level sensing puzzles. EDM mechanical level detectors have many configurations available. If you don't see what you need, we will engineer a solution for your application.



Features and Benefits

- Five-year warranty
- ASME Section IX and AWS qualified welding system
- Designed to ANSI/ASME B31.1 and B31.3 guidelines
- Hermetically sealed detecting mechanisms available
- Stainless steel detecting mechanisms
- High-temperature capability
- Wide variety of explosion-proof housings
- Versatile detecting mechanisms which retro-fit into other manufacturers' units
- Worldwide listings and certifications
- Quick worldwide delivery
- Only ASTM grade materials with certified mill test reports used
- GOST R Certificate for Russia
- Safety Certified to IEC 61508 (SIL)
EDM products are certified to IEC 61508 for non-redundant use in SIL1 and SIL2 Safety Instrumented Systems for most models. For more details or values applicable to a specific product, see the Safety Integrity Level Quick Guide .

EWX601-005098-005 mechanical level detectors are float operated, horizontal mounted with sealed, tamper-proof or flanged, serviceable chambers.

Model Number System

EWX601-005098-005


Maximum Working Pressure

Chamber Material	Pressure at Listed Temperature in psig (bar)*					
	100°F (38°C)	200°F (93°C)	300°F (149°C)	350°F (177°C)	400°F (204°C)	450°F (232°C)
A106B	750 (51.7)	750 (51.7)	750 (51.7)	729 (50.3)	709 (48.9)	690 (47.6)

Product Specifications


Chamber Material		Trim Material	
316/316L Stainless Steel		Float/Displacer Material	316/316L SS
with A182-316/316L and A403-316/316L fittings		Attraction Sleeve	316/316L SS
Housing		Detecting Mechanism	
General Purpose, NEMA 4 Housings		Detecting Description	
Enclosure Rating	NEMA 4, 4x (IP66)	Extra-High Temperature (Ceramic)	
Description	Aluminum	Detector Designator	SPDT
Electical/Pneumatic Connections	1” NPT	Minimum Temperature	-40°F (-40°C)
		Maximum Temperature	800°F (427°C)
Process Connection		Detector Ratings	1A @ 20-30VDC
Style	VH(Vertical/Horizontal)		
Size	1”		
Connection Designator	Socket Weld		
Minimum Specific Gravity	0.50		

The chart here provides typical standard Set Points.



Specific Gravity	B inch (mm)	C inch (mm)
.50	3 (76)	3-11/16 (94)
1.0	4-11/16(119)	5 (127)

Dimensions listed are for reference only and are expressed as millimeters over inches. (Linear = mm/in.)

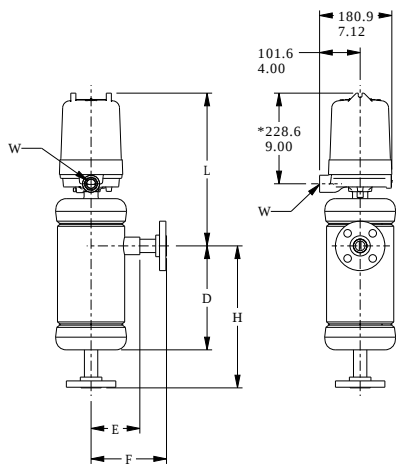

D ^{1, 2}	E ^{1, 2}	F ⁴	H ⁴	L ²
inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)
10-1/4 (260)	4-13/16 (122)	7-7/16 (189)	14 (356)	15-3/16(386)